

Boxit



- LED exit sign
- Low Profile
- 50,000 hour lamp
- Low power consumption
- Long life battery
- Easily changeable decals
- Suits 24M viewing distances
- Maintained or Non- Maintained
- Wall mount or ceiling mount version
- Emergency light classification

Wall mount



Rodmount



Cantilever



The Boxit comes complete with a 1.2 watt long life led lamp, High temperature nickel metal hydride batteries and efficient electronic circuit.

Wall or Ceiling mount versions available. Can be used as an Emergency light

Supplied complete with a set of easy replaceable running man decals to suit every application.

Approvals and Standards

AS 2293-3:2005+A1:2010
 AS/ NZS 60598-2-22:2005
 AS 61000.3.2:2007 + A1:2009
 EN 60598-1:2008+A11:2009
 EN 60598-2-22:1998+A1:2003+A2:2008
 EN 55015:2006+A1:2007+A2:2009
 EN 61547:2009
 EN 61000-3-2:2006+A1:2009+A2:2009
 EN 61000-3-3: 2008

ORDERING INFORMATION

CODE	DESCRIPTION	PRODUCT NUMBER	POWER	CARTON QTY.	WEIGHT (NET/ GROSS)
5004	Boxit (Base and Gear- tray)	9336462050040	2.3W	4	3.76 Kg / 4.18 Kg
5003	Boxit (Gear Tray- Bulk)	9336462050033	2.3W	4	2.50 Kg / 2.91 Kg
5001	Boxit (Wall Mount)	9336462050019	2.3W	4	5.19 Kg / 5.84 Kg

OPERATIONAL INFORMATION

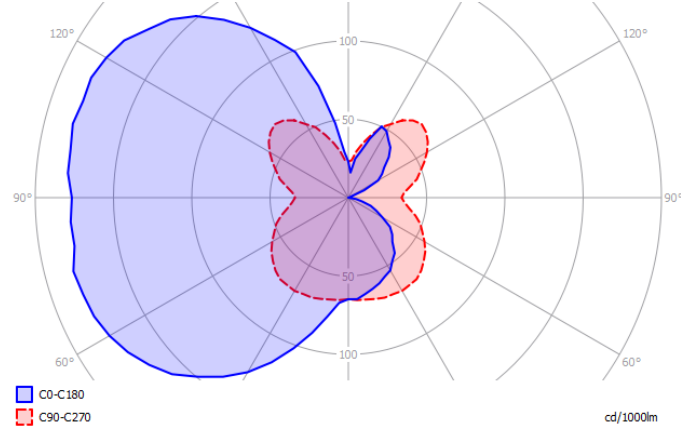
GENERAL				BATTERY	
Voltage (V)	220-240V	Viewing Distance	24M	Battery Type	NI- MH
Frequency (Hz)	50	Classification	C0:E2 C90:E2 C180:C2	Battery Code	1938
Max. Ambient Temp.	50°C	Mounting Type	Wall	Charger Type	Continuous
Class	2	Lamp Code	1941	Charging Time	16 Hours
Wiring	16mm Terminals	IP Rating	IP20	Charger Operation	Trickle
		Duration	2 hours		

SPACING TABLE (DISTANCE BETWEEN FITTINGS)

(m)	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	15.0	20.0
C2 [0.2 Lux]	4.1	4.1	4.1	3.9	3.7	3.3	2.6									
E2 [0.2 Lux]	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0								

COMPLIANCE

TEST TYPE	LABORATORY	TEST REPORT NUMBER	DATE OF ISSUE
Temperature and Duration	Light Lab International	LL113402T	03/02/2012
Emergency Classification	Light lab International	LL15174	23/02/2012
Emergency Classification	Light lab International	LL15175	23/02/2012
Emergency Classification	Light lab International	LL15176	28/02/2012

EMERGENCY PHOTOMETRIC DATA


GAMMA	C0	C45	C90	C135
0	64.8	64.8	64.8	64.8
10	77	74.0	66.0	62.8
20	102.3	90.4	67.9	62.2
30	128.6	109.9	68.7	60.3
40	149.2	125.8	67.9	57.4
50	166	138.2	62.9	51.6
60	176.2	145.7	56.2	42.7
70	180.3	146.9	49.0	35.1
80	177.6	144.9	39.5	24.6
90	176.6	142.2	34.0	19.8

CONSTRUCTION AND DIMENSIONS

Body	PC
Gear Tray	PC
Diffuser	PC
Lens	PC
Cut Out	N/ A
Fixing Centres	272mm

